


DB9 & DB25 Mini Tracers

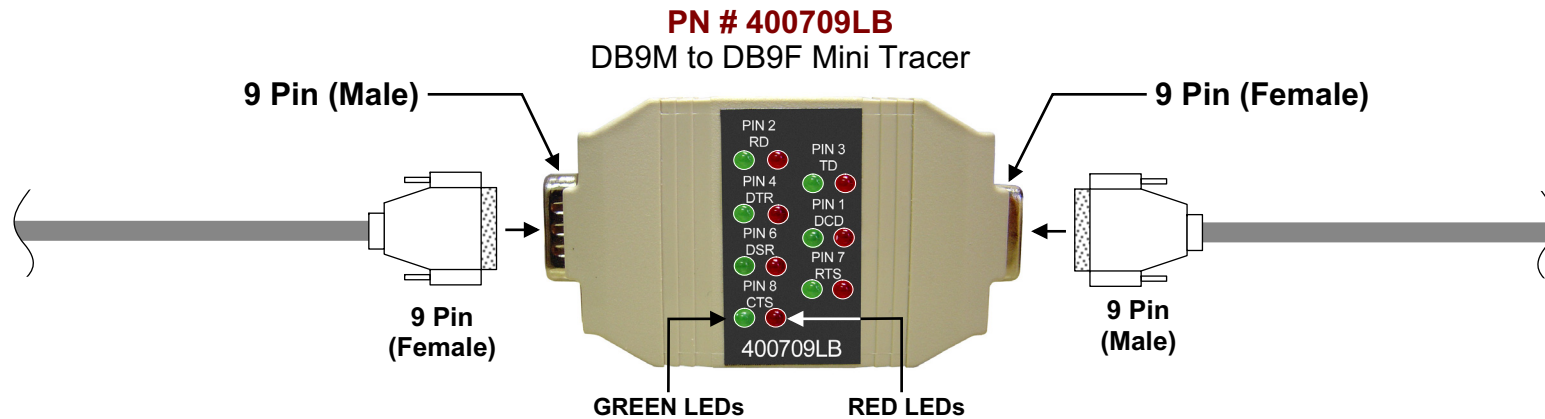

PIN 2:	RxD	Receive Data
PIN 3:	TxD	Transmit Data
PIN 4:	DTR	Data Terminal Ready
PIN 1:	DCD	Carrier Detect
PIN 6:	DSR	Data Set Ready
PIN 7:	RTS	Request To Send
PIN 8:	CTS	Clear To Send

Application:

TAG's DB9 Mini Tracer (PN # 400709LB) is used to test RS-232 circuits.
(Negative voltage LED = RED, Positive voltage LED = GREEN)

Also Available -



PN # 400725LB
DB25M to DB25F
Mini Tracer

Ordering Information:

400709LB
400725LB

DB9M to DB9F Mini Tracer
DB25M to DB25F Mini Tracer

Call for Pricing

150 Cooper Rd. (F-15)
W. Berlin, NJ 08091

www.tagcords.com
Telecom Assistance Group

Telephone: (856) 753-8585
Fax : (856) 768-7645