


Marconi (Reliance)

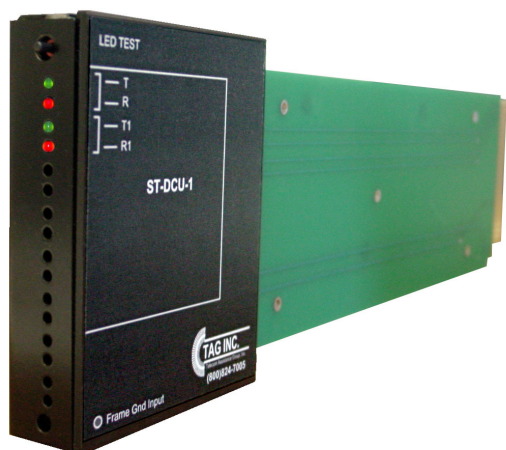

ST-DCU-1

DISC*S Streaker Card
(w/ LEDs)

Application:


The ST-DCU-1 provides a quick method to verify correct wiring when installing DISC*S. With the grounded test probe (P-2000) touch a pin on the Frame. The associated LED will illuminate on the ST-DCU-1. The ST-DCU-1 brings out the tip and ring leads.

TB-DCU-1

DISC*S Test Board
(w/ Bantam Jacks)

Application:

The TB-DCU-1 plugs in the Marconi DISC*S card slots and has Bantam jacks that allow access to the cabling from the card slot to the cross-connect wiring points. Using a T1 Test Set, the tester can transmit and receive T1 signals to verify cable acceptance and

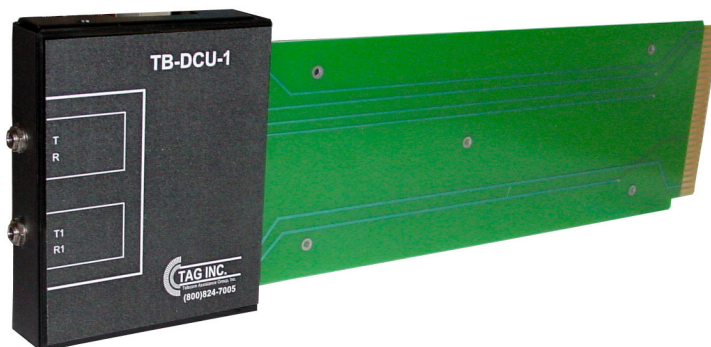

D36R

DISC*S DCU Blank Board

Application:

- Protect vacant slots created by ISDN
 - Customized identification on faceplate (. . . "ACTIVE CIRCUIT")
 - Present and future applications for DISC*S shelves
 - Eliminate customer service interruptions by plugging cards into these "active" slots
- ** Discounts available based on quantity

150 Cooper Rd. (F-15)
W. Berlin, NJ 08091

www.tagcords.com

Telecom Assistance Group

Telephone: (856) 753-8585

Fax: (856) 768-7645