


HDSL 2/4 Wire Voltage Monitor

H2VM

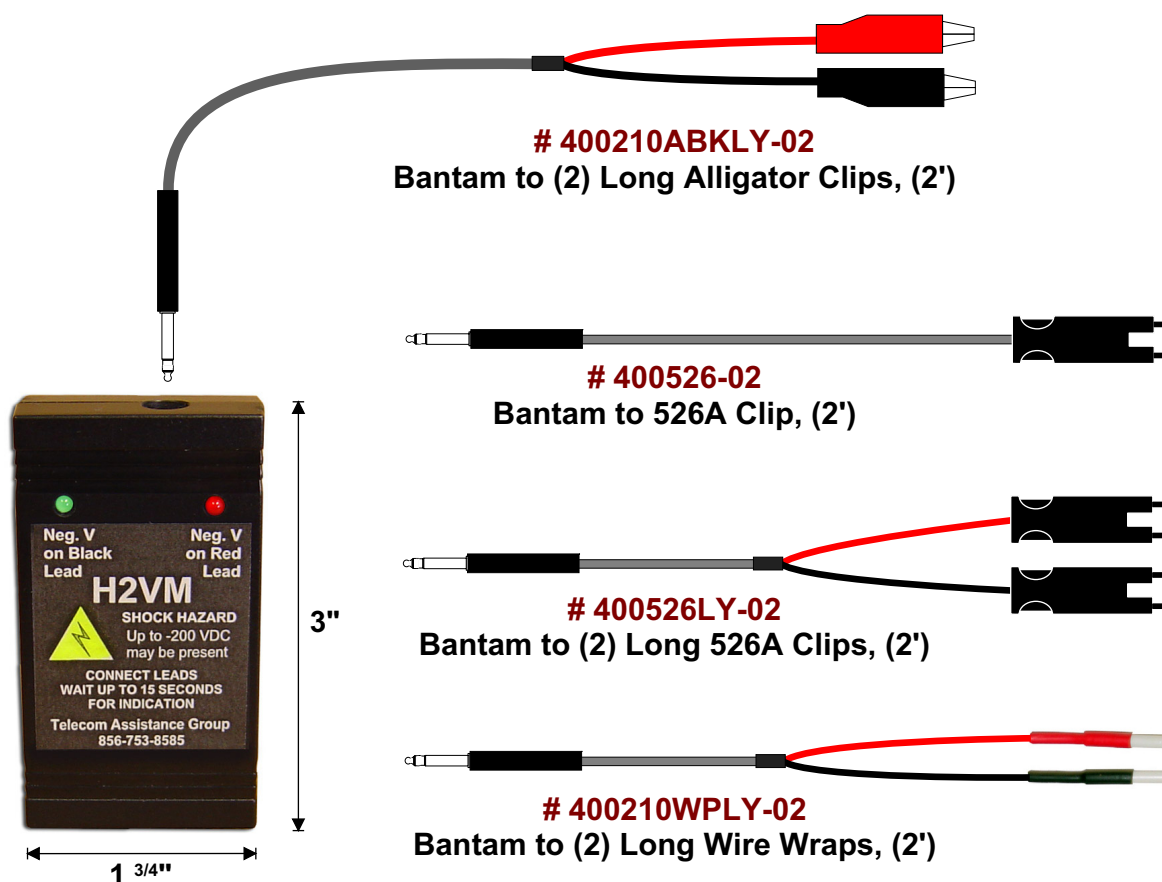

H2VM

HDSL 2/4 Wire Voltage Monitor

Includes belt clip & (1) 400210ABKLY-02 (see above)

Application:

The H2VM Voltage Monitor is used to verify power on HDSL 2 Wire and 4 Wire Circuits at the MDF and other Cross Connect points.

Ordering Information:

H2VM

HDSL 2/4 Wire Voltage Monitor

includes: (1) H2VM & (1) 400210ABKLY-02

Call for Pricing

H2VM-KIT01

HDSL 2/4 Wire Voltage Monitor Kit 1

includes: (1) H2VM, (1) 400210ABKLY-02, (1) 400526-02, (1) 400526LY-02, (1) 400210WPLY-02 & (1) carrying case

150 Cooper Rd. (F-15)
W. Berlin, NJ 08091

www.tagcords.com

Telecom Assistance Group

Telephone: (856) 753-8585

Fax: (856) 768-7645