


19" & 23"  
Heat Deflectors  
are Available

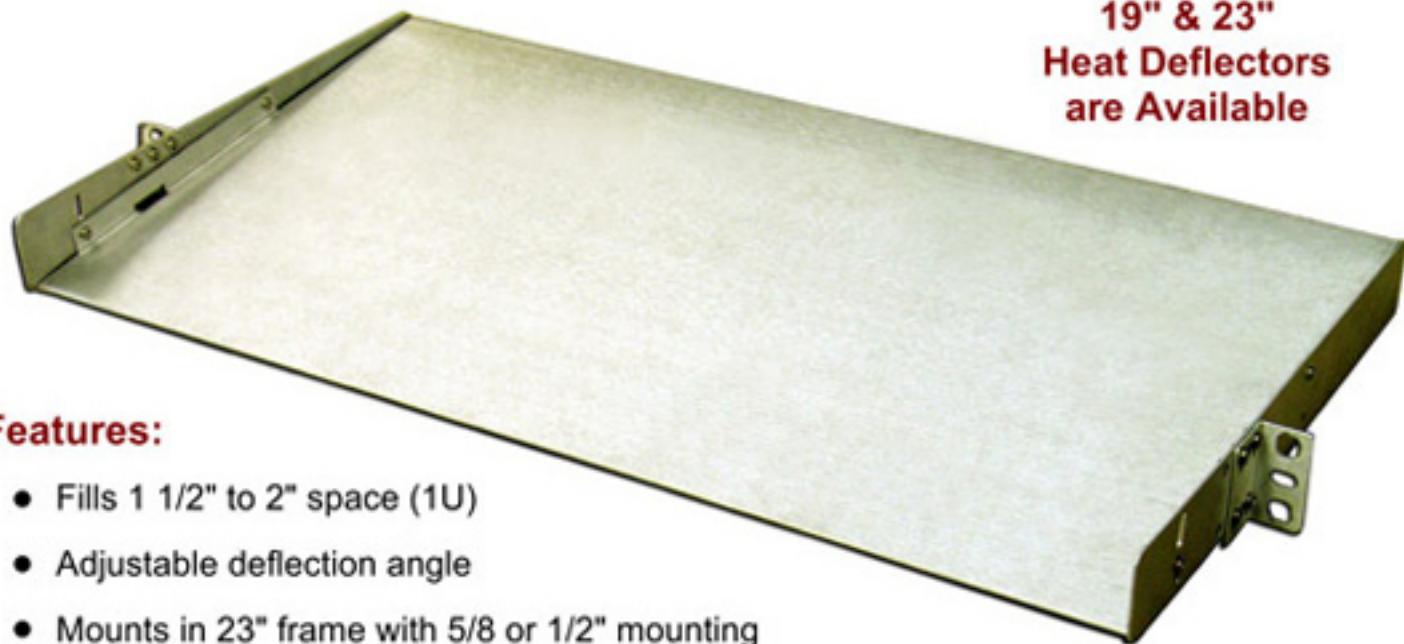

### Features:

- Fills 1 1/2" to 2" space (1U)
- Adjustable deflection angle
- Mounts in 23" frame with 5/8 or 1/2" mounting
- Hardware supplied

#### Adjustable Tilt: Up



#### Adjustable Tilt: Down



### Application:

The SHD-23 is installed between chassis in a 23" frame allowing cool air to enter the bottom front of the chassis and heated air to exit the top rear. This prevents a lower chassis from heating the chassis above it. Heat deflectors are also available for 19" frames - see ordering information below.

### Ordering Information:

SHD-23

CO Shelf - Heat Deflector, (23")

Call for Pricing

SHD-19

CO Shelf - Heat Deflector, (19")

150 Cooper Rd. (F-15)  
W. Berlin, NJ 08091

Telephone: (856) 753-8585  
Fax : (856) 768-7645

[www.tagcords.com](http://www.tagcords.com)

Telecom Assistance Group