



Connect to Litespan

a.) CONNECT TO THE LITESPAN 2000
Loosen the Thumb Screws & open the Litespan Access Panel.

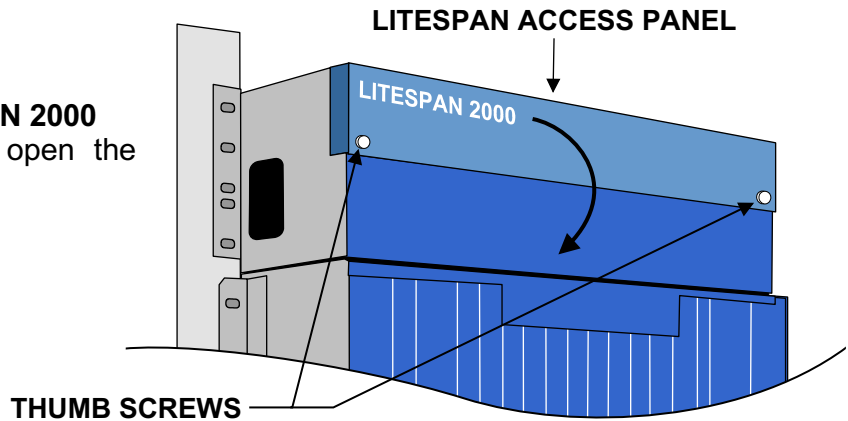


b.)
Thread the DB9 Male end of the RH-SPLS through the exit hole on the left side of the chassis & plug it into the DB9 Craft Access Jack. Leave the RJ45 Adapter outside of the Litespan.

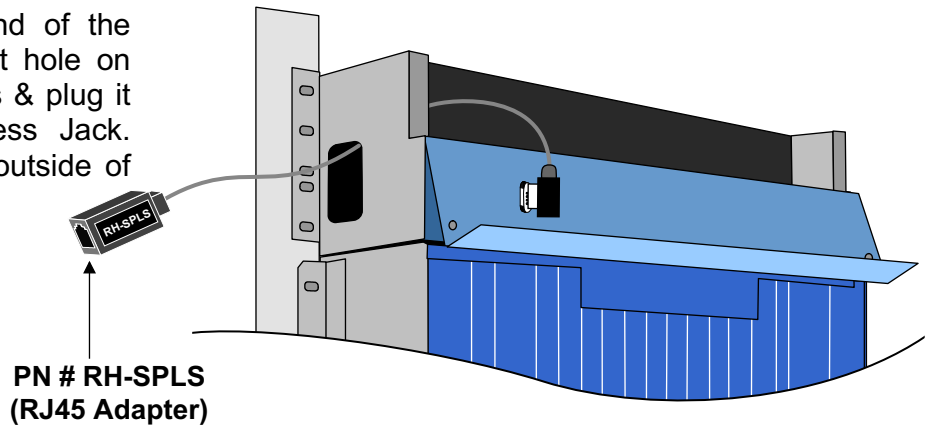

RH-SPLS
Litespan 2000
Adapter, (1')
(RJ45 to DB9)

VZ ID # 1108 3749

PN # RH-CAT5-XX →
TAG RH-CAT5
(4pr cable)

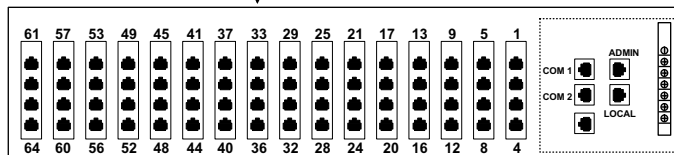

PN # RH-C23
RHTAS System Controller Chassis (REAR VIEW)