


5ESS “Pre-Charge” Tool

T-5ESSPCT

5ESS Fuse Bay Control Panel,
Lucent # ED-83024-30

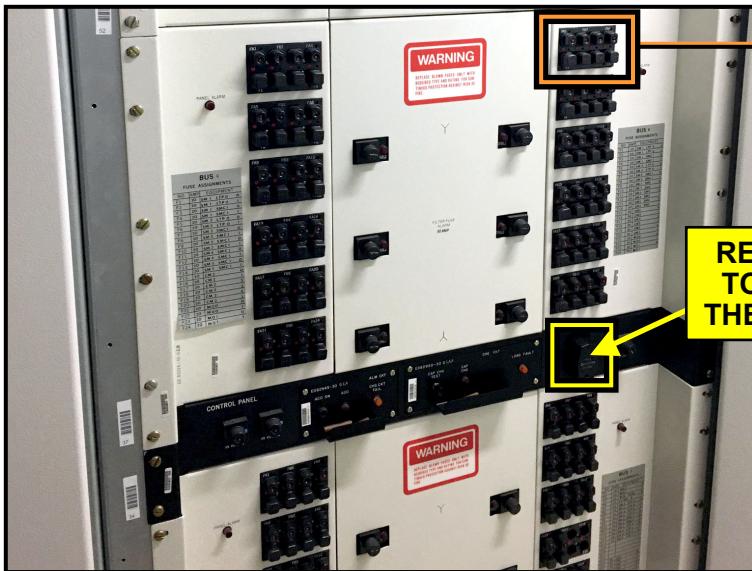

PN # T-5ESSPCT
5ESS Pre-Charge Tool
(control panel pre-charge
tool replacement)

PUSH TO CHARGE



1. INSERT PROBE (ALARM FUSE)
2. PRESS TEST BUTTON
3. RED & GRN LEDS WILL LIGHT
4. 4-6 SEC LEDS WILL GO OUT
5. INSTALL MAIN FUSE
6. IF RED LED STAYS ON EXCESS LOAD OR SHORT IS PRESENT

Application:

TAG's PN # T-5ESSPCT is used to pre-charge shelf power capacitors of a 5ESS switch. This allows a new fuse to be installed without seeing full in-rush surge current. The indicator light goes out when it is safe to install the fuse.

Ordering Information:

T-5ESSPCT

5ESS “Pre-Charge” Tool for Capacitor Charging at Main Fuse Bay
(control panel pre-charge tool replacement)

AT&T PID #

ATT.200011751

150 Cooper Rd. (F-15)
W. Berlin, NJ 08091

www.tagcords.com
Telecom Assistance Group

Telephone: (856) 753-8585
Fax : (856) 768-7645